

## OS TYPE – OFFSET EYE CABLE SOCKS

### **⚠ WARNING**


Cancer and Reproductive Harm: [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



### KEY FEATURES

- ✓ Available in galvanised steel or stainless steel
- ✓ Suitable for underground installations
- ✓ Fits easily onto electrical cables

Similar to the SE Type single eye cable sock, but for when offset positioning is required. Excellent for pulling slack out of lines that have been pulled. May also be used for removing underground cables when end of cable is available.

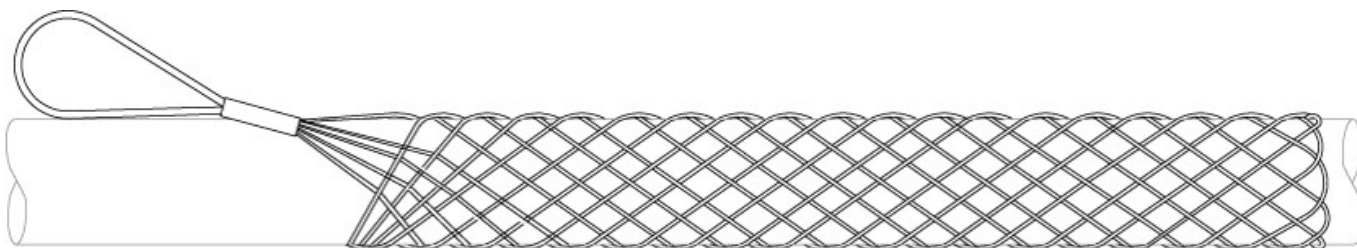

L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

### GET IN TOUCH

+61 3 8840 6556  
sales@slingcoaustralia.com.au

## OS TYPE – OFFSET EYE CABLE SOCKS

### Offset Eye Standard Sock - Galvanised

Slingco Part No.	Range (mm)	Range (in)	Lattice Weave	Lattice Length (mm)	Lattice Length (in)	Overall Length (mm)	Overall Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS1860	6 - 13	0.25 - 0.50	Single	230	9	305	12	760	1,680
ZCS1861	13 - 19	0.50 - 0.75	Single	355	14	430	17	1,015	2,240
ZCS1862	19 - 25	0.75 - 1.00	Single	405	16	510	20	2,540	5,600
ZCS1863	25 - 38	1.00 - 1.50	Single	455	18	610	24	3,555	7,837
ZCS1864	38 - 50	1.50 - 2.00	Double	535	21	735	29	5,080	11,200
ZCS1865	50 - 63	2.00 - 2.50	Double	610	24	865	34	5,080	11,200
ZCS1866	63 - 89	2.50 - 3.50	Double	685	27	990	39	6,095	13,440
ZCS1867	89 - 115	3.50 - 4.50	Double	685	27	990	39	7,110	15,680
ZCS1974	115 - 140	4.50 - 5.50	Double	685	27	990	39	7,110	15,680

### Offset Eye Standard Sock - 316 Stainless Steel

Slingco Part No.	Range (mm)	Range (in)	Lattice Weave	Lattice Length (mm)	Lattice Length (in)	Overall Length (mm)	Overall Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS1986	6 - 13	0.25 - 0.50	Single	230	9	305	12	610	1,344
ZCS1987	13 - 19	0.50 - 0.75	Single	355	14	430	17	810	1,792
ZCS1988	19 - 25	0.75 - 1.00	Single	405	16	510	20	2,030	4,480
ZCS1989	25 - 38	1.00 - 1.50	Single	450	17.75	700	27.50	2,845	6,272
ZCS1990	38 - 50	1.50 - 2.00	Double	535	21	735	29	4,065	8,960
ZCS1991	50 - 63	2.00 - 2.50	Double	610	24	865	34	4,065	8,960
ZCS1992	63 - 89	2.50 - 3.50	Double	685	27	990	39	4,875	10,752
ZCS1993	89 - 115	3.50 - 4.50	Double	685	27	990	39	5,690	12,544
ZCS1994	115 - 140	4.50 - 5.50	Double	685	27	990	39	5,690	12,544
ZCS4069	140 - 180	8.0 - 9.0	Double	596	59	976	74	2,041	20,000
	203 - 229			1,500		1,880		8,928	

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Australia Pty. Ltd

#### Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

**Range dimension overlaps** If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

#### GET IN TOUCH

+61 3 8840 6556

sales@slingcoaustralia.com.au