

CABLE DRUM ROTATOR

⚠ WARNING


Cancer and Reproductive Harm: www.P65Warnings.ca.gov



KEY FEATURES

- ✓ Pressed steel construction
- ✓ Ideal for where space is limited.
- ✓ 60 mm diameter zinc plated rollers
- ✓ Sealed roller bearings fitted
- ✓ Spring loaded shafts for easy replacement/adjustment
- ✓ Capacity 200 Kg
- ✓ Max / min drum size 800 / 300 mm
- ✓ Drum Width 450 mm
- ✓ Zinc plated finish
- ✓ Weight: 10.5 Kg

This is a compact light weight Cable Drum Rotator. Drums are simply rolled up the ramp on to the adjustable rollers to allow it to spin freely.

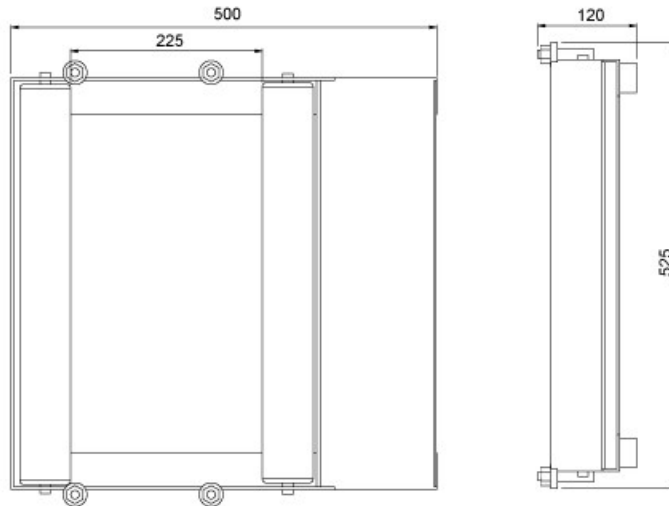

Slingco Part No.	Base Footprint (mm)	Height (mm)	Max Capacity (kg)
ZGP8267	500 x 525	120	200

Slingco Part No.	Base Footprint (in)	Height (in)	Max Capacity (lb)
ZGP8267	19.68 x 20.66	4.72	440



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

CABLE DRUM ROTATOR

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



GET IN TOUCH

 01706 855 558

 sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478