

# FLEXIBLE & THIMBLE EYE CABLE GRIPS - SINGLE EYE

## ⚠ WARNING

Cancer and Reproductive Harm: [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)




## KEY FEATURES

- ✓ Specifically designed for metric sized cable
- ✓ Available with soft or reinforced eye
- ✓ Longer lattice length

Designed to fit the typical European range of cables, and with a longer lattice length, these grips are ideal for pulling medium to heavy loads. Made of galvanised steel.

This grip has a flexible eye construction – and is also available with a reinforced thimble eye.

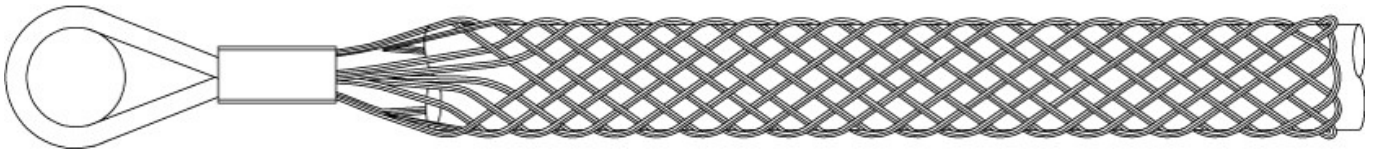

Flexible Eye	Thimble Eye	Type	Range (mm)	Lattice Length (in)	Lattice Length (mm)	Overall Length (in)	Overall Length (mm)	Approx. Break Load (lb)	Approx. Break Load (kg)
ZCS0824	ZCS3133	Single	15 - 20	48	1,220	53.5	1,358	2,730	1,240
ZCS0825	ZCS3134	Single	20 - 30	49	1,250	53.5	1,358	3,370	1,530
ZCS0826	ZCS3135	Double	20 - 30	49	1,250	55	1,393	4,380	1,990
ZCS0827	ZCS3136	Single	30 - 40	49	1,250	55	1,393	5,620	2,550
ZCS0828	ZCS3137	Double	30 - 40	49	1,250	65	1,652	6,740	3,060
ZCS0829	ZCS3138	Double	40 - 50	59	1,500	65.5	1,661	13,060	5,930
ZCS0830	ZCS3139	Double	50 - 60	59	1,500	69	1,750	14,610	6,630
ZCS0831	ZCS3140	Double	60 - 70	59	1,500	69	1,750	17,160	7,790
ZCS0832	ZCS3141	Double	70 - 90	59	1,500	69	1,750	17,870	8,110
ZCS0833	ZCS3142	Double	90 - 110	59	1,500	69	1,750	26,070	11,830
ZCS0834	ZCS3143	Double	110 - 130	59	1,500	69	1,750	26,070	11,830
ZCS0835	ZCS3144	Double	120 - 150	59	1,500	69	1,750	28,100	12,750
ZCS0836	ZCS3145	Double	140 - 180	59	1,500	69	1,750	28,100	12,750



## GET IN TOUCH

01706 855 558

sales@slingco.com

# FLEXIBLE & THIMBLE EYE CABLE GRIPS - SINGLE EYE

Slingco Part No.	Range	Range (mm)	Lattice Length	Lattice Length (mm)	Approx. Break Load	Approx. Break Load (kg)
ZCS4783	2.36 - 2.75	60 - 70	43	1,096	17,450	7,790
ZCS4784	2.75 - 3.54	70 - 90	43	1,096	18,166	8,110
ZCS4785	3.54 - 4.33	90 - 110	43	1,096	26,500	11,830
ZCS4786	4.33 - 5.11	110 - 130	43	1,096	26,500	11,830
ZCS4787	4.72 - 5.90	120 - 150	43	1,096	28,560	12,750

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.

## Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

**Range dimension overlaps** If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



## GET IN TOUCH

01706 855 558

sales@slingco.com