



# Grounding Clamps

Providing safe and effective grounding connections



# Grounding Clamps





Providing safe and effective grounding connections

Slingco's grounding clamps meet ASTM F855 and have a maximum line range of up to 2" (50.8mm) which allows them to be used in a wide variety of grounding applications.

- ✔ Meets ASTM F855 specification
- ✔ Line range up to 2" (50.8 mm)
- ✔ Adjustable to ensure secure connection between clamp and cable


## ALUMINIUM CLAMPS

Slingco's aluminium grounding clamps have a location for a grounding stud which allows for a wide variety of grounding applications. The Slingco aluminium clamps come with serrated and a smooth jaw offering.

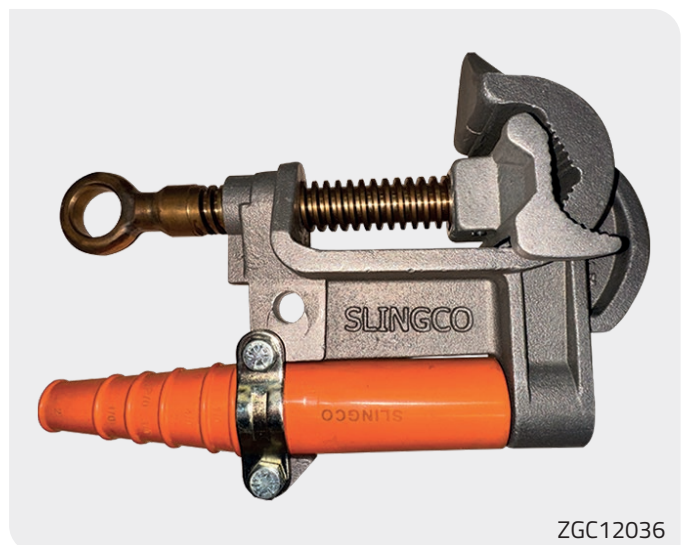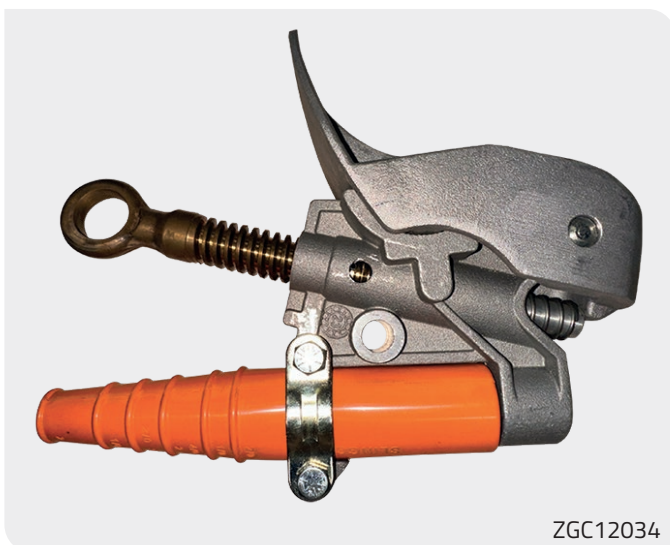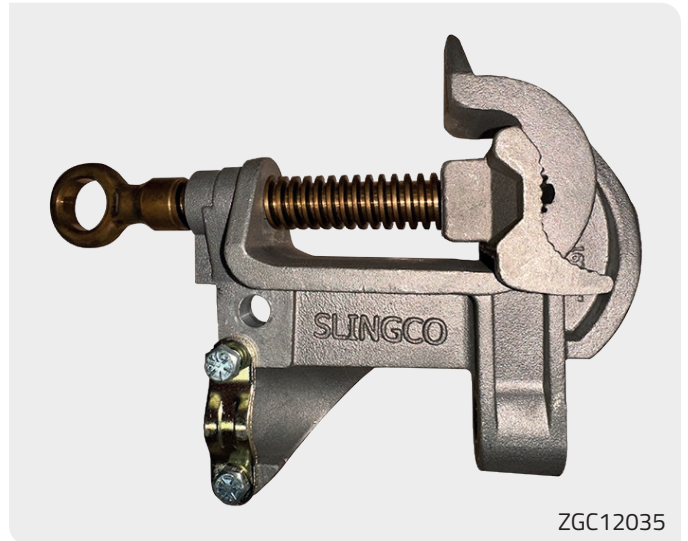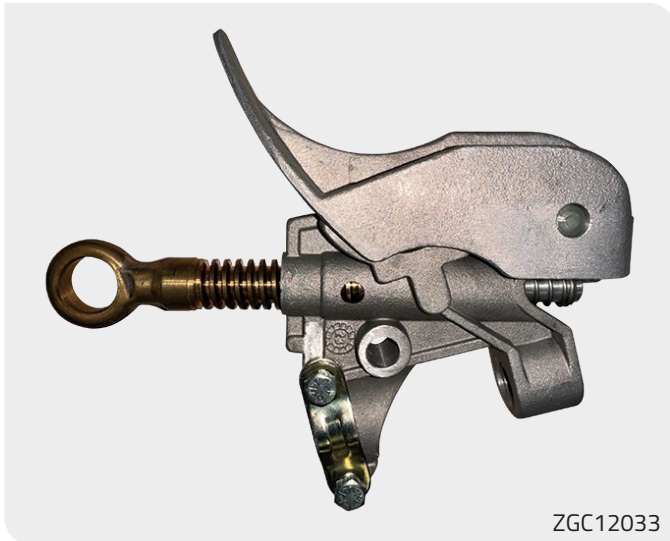




ZGC12037

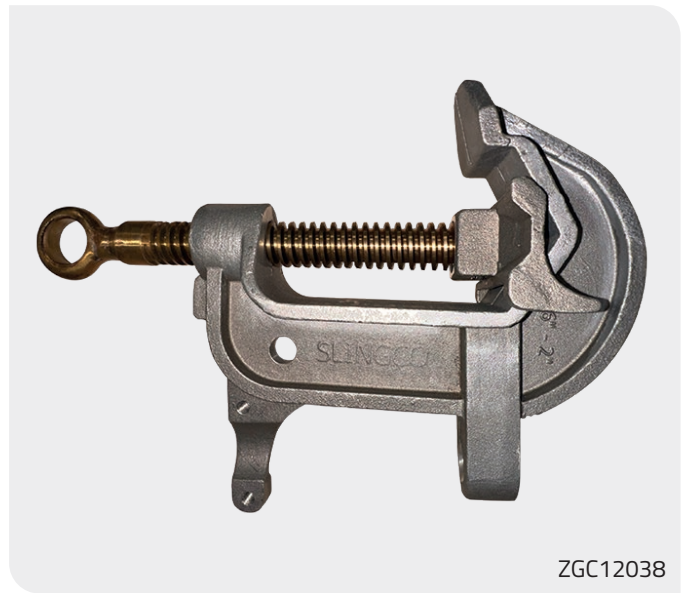


ZGC12038

## BRONZE CLAMPS

Slingco's bronze grounding clamps have set screws in the moveable jaw which allows the user to adjust and make sure there is a secure connection between the clamp and cable. The flat face clamps come with a serrated jaw and are available with a T-handle or Eye Bolt.

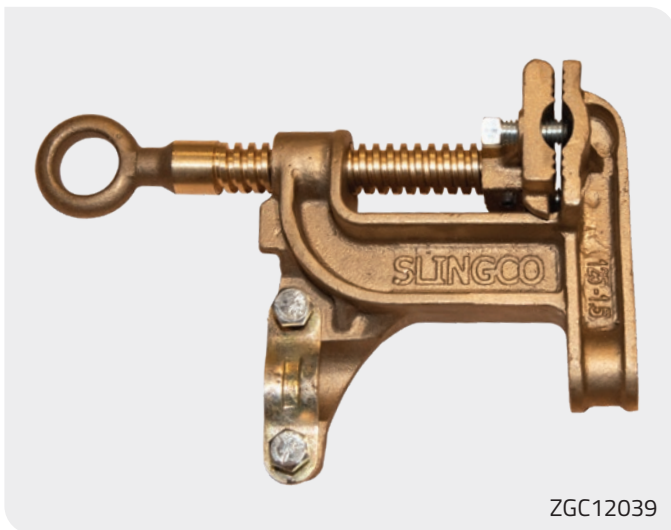

ZGC12039

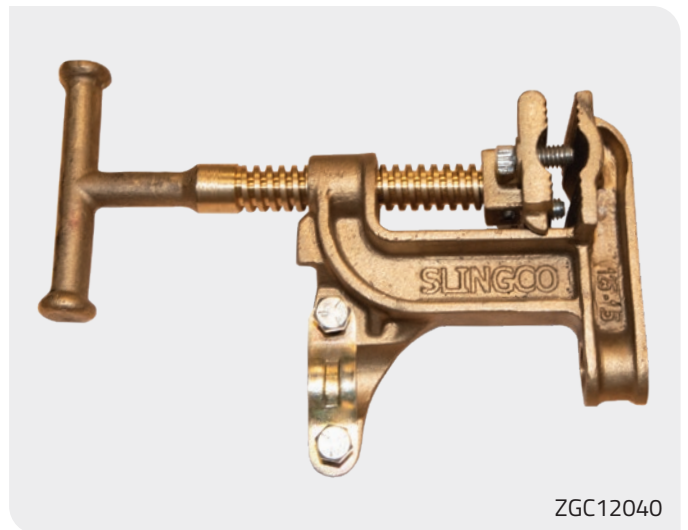

ZGC12040

Slingco Part no.	Description	Clamp Material	Eye Type	Class/ASTM Grade	Line Range		Weight	
					in	mm	lb	kg
ZGC12033	Duckbill Clamp w/o Strain Relief	Aluminium	Eye Bolt	Class B/Grade 5H	0.16-1.66	4.06-42.16	1.85	0.84
ZGC12034	Duckbill Clamp w/ Strain Relief	Aluminium	Eye Bolt	Class B/Grade 5H	0.16-1.66	4.06-42.16	1.98	0.90
ZGC12035	1.5" (38 mm) C-Clamp w/o Strain Relief	Aluminium	Eye Bolt	Class B/Grade 5	0.16-1.50	4.06-38.10	1.85	0.84
ZGC12036	1.5" (38 mm) C-Clamp w/ Strain Relief	Aluminium	Eye Bolt	Class B/Grade 5	0.16-1.50	4.06-38.10	1.98	0.90
ZGC12037	2" (51 mm) C-Clamp w/ Serrated Jaw	Aluminium	Eye Bolt	Class B/Grade 5H	0.16-2.00	4.06-50.80	2.25	1.02
ZGC12038	2" (51 mm) C-Clamp w/ Smooth Jaw	Aluminium	Eye Bolt	Class A/Grade 5H	0.16-2.00	4.06-50.80	2.20	1.00
ZGC12039	1.5" (38 mm) Flat Face Grounding	Bronze	Eye Bolt	Class B/Grade 5	0.125-1.50	3.18-38.10	1.98	0.90
ZGC12040	1.5" (38 mm) Flat Face Grounding	Bronze	T Handle	Class B/Grade 5	0.125-1.50	3.18-38.10	2.16	0.98





**Slingco Limited**

Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG, England  
Tel: +44 [0]1706 855558 · [contact@slingco.com](mailto:contact@slingco.com)

For any enquiries call or visit  
**+44 [0]1706 855558 | [slingco.com](http://slingco.com)**