




Jumper Clamps

Lightweight, impact resistant
and incredibly durable



JUMPER CLAMPS

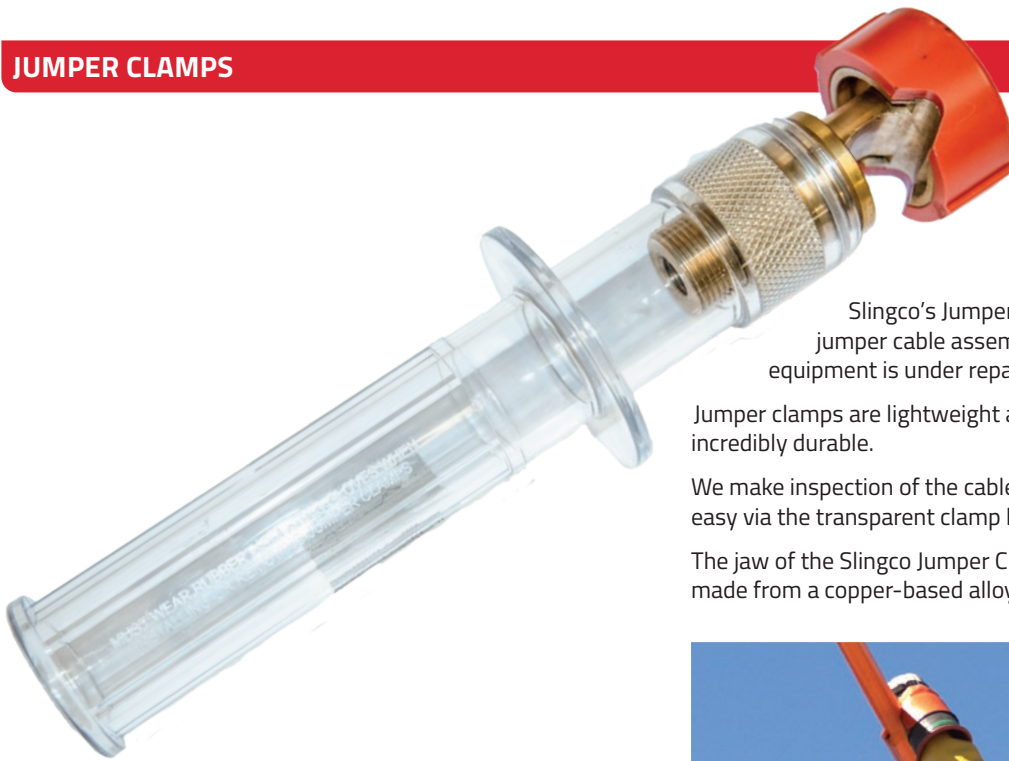

Slingco's Jumper Clamps are used as a part of jumper cable assemblies to bypass work areas when equipment is under repair or being upgraded.

Jumper clamps are lightweight and impact resistant making them incredibly durable.

We make inspection of the cable, ferrule, and clamp simple and easy via the transparent clamp body.

The jaw of the Slingco Jumper Clamp and floating ring contact is made from a copper-based alloy.

- ✓ Lightweight and impact resistant
- ✓ Transparent clamp body for easy inspection of cable, ferrule and clamp
- ✓ Copper-based alloy clamp and floating ring contact
- ✓ Meet ASTM F2321 standard



Slingco Part No	Line Range	Max. Continuous Amps	Threading	Length	Weight
ZSC09344	954 MCM (0.162 - 1.25)	400	5/8" - 11 threads/inch	11.5" (292mm)	2.5 lbs (1.15 kg)
ZSC12110	477 MCM (0.162 - 0.9)	400	5/8" - 11 threads/inch	11.5" (292mm)	2.4 lbs (1.09 kg)

NOTE: Slingco Jumper Clamps are sold individually. Slingco Jumper Clamps meet ASTM F2321 standard.



Slingco Limited

Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG, England
Tel: +44 [0]1706 855558 · contact@slingco.com

For any enquiries call or visit
+44 [0]1706 855558 | slingco.com