


DE TYPE - DOUBLE EYE CABLE GRIPS



KEY FEATURES

- ✓ Available in galvanized steel or stainless steel
- ✓ Suitable for underground installations
- ✓ Fits easily onto electrical cables

Ideal for pulling light to medium loads; the main advantage over the single eye cable grip is the cable being pulled can be passed through the grip, several cable grips can be used to support over a calculated distance. Double Eye cable grips are excellent as hose restraints for lower psi-rated hoses. A thimble eye may be custom ordered with these grips.

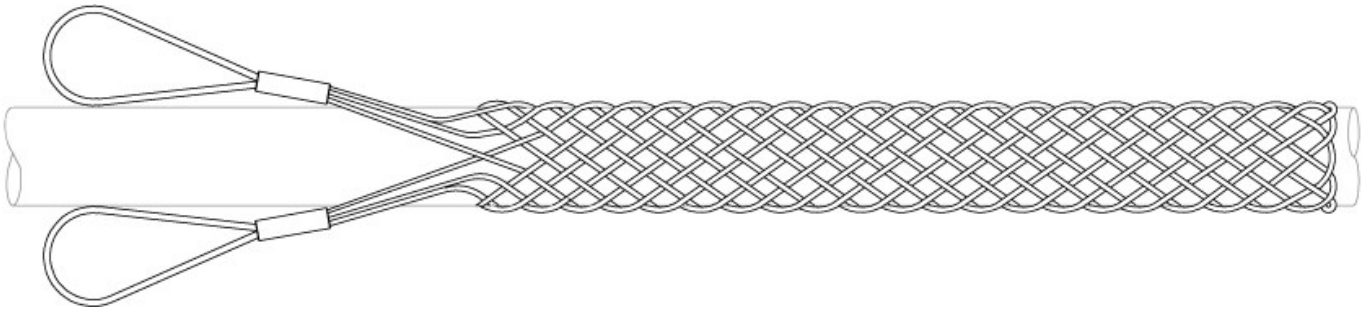

GET IN TOUCH



1 888 685 9478



sales@slingcoamerica.com

DE TYPE - DOUBLE EYE CABLE GRIPS

Double Eye Standard Grip - Galvanized

Slingco Part No.	Range (in)	Range (mm)	Lattice Length (in)	Lattice Length (mm)	Lattice Weave	Overall Length (in)	Overall Length (mm)	Approx. Break Load (lb)	Approx. Break Load (kg)
ZCS0305	0.25 - 0.50	6 - 13	9	230	Single	12	305	1,680	760
ZCS0306	0.50 - 0.75	13 - 19	14	355	Single	17	430	2,240	1,015
ZCS0307	0.75 - 1.00	19 - 25	16	405	Single	20	510	5,600	2,540
ZCS0308	1.00 - 1.50	25 - 38	18	455	Single	24	610	7,840	3,555
ZCS0309	1.50 - 2.00	38 - 50	21	535	Double	29	735	11,200	5,080
ZCS0310	2.00 - 2.50	50 - 63	24	610	Double	34	865	11,200	5,080
ZCS0311	2.50 - 3.50	63 - 89	27	685	Double	39	990	13,440	6,095
ZCS0312	3.50 - 4.50	89 - 115	27	685	Double	39	990	15,680	7,110
ZCS0878	4.50 - 5.50	115 - 140	27	685	Double	39	990	15,680	7,110
ZCS3579	5.31 - 6.30	135 - 160	39.37	1,000	Double	63	1,600	44,800	20,000
ZCS3580	6.33 - 7.48	161 - 190	59.05	1,500	Double	82.67	2,100	60,480	27,000
ZCS3581	7.51 - 8.66	191 - 220	59.05	1,500	Double	82.67	2,100	60,480	27,000
ZCS3582	8.70 - 9.84	221 - 250	59.05	1,500	Double	82.67	2,100	60,480	27,000



GET IN TOUCH

1 888 685 9478

sales@slingcoamerica.com

DE TYPE - DOUBLE EYE CABLE GRIPS

Double Eye Standard Grip - 316 Stainless Steel

Slingco Part No.	Range (in)	Range (mm)	Lattice Length (in)	Lattice Length (mm)	Lattice Weave	Overall Length (in)	Overall Length (mm)	Approx. Break Load (lb)	Approx. Break Load (kg)
ZCS0823	0.25 - 0.50	6 - 13	9	230	Single	12	305	1,344	610
ZCS1007	0.50 - 0.75	13 - 19	14	355	Single	17	430	1,792	810
ZCS0931	0.75 - 1.00	19 - 25	16	405	Single	20	510	4,480	2,030
ZCS1265	1.00 - 1.50	25 - 38	18	455	Single	24	610	6,272	2,845
ZCS3995	1.14 - 1.57	29 - 40	50	1,270	Double	62	1,575	35,000	15,625
ZCS1252	1.50 - 2.00	38 - 50	21	535	Double	29	735	8,960	4,065
ZCS0319	2.00 - 2.50	50 - 63	24	610	Double	34	865	8,960	4,065
ZCS0213	2.50 - 3.50	63 - 89	27	685	Double	39	990	10,752	4,875
ZCS4873	2.50 - 3.50	63 - 89	70	1,778	Double	80	2,032	13,500	6,027
ZCS4596	2.50 - 3.50	63 - 89	56	1,422	Triple	152	3,860	16,138	7,204
ZCS0332	3.50 - 4.50	89 - 115	27	685	Double	39	990	12,544	5,690
ZCS1982	4.50 - 5.50	115 - 140	27	685	Double	39	990	12,544	5,690
ZCS4869	4.50 - 5.50	115 - 140	70	1,778	Double	80	2,032	13,500	6,027

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco America, Inc.

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



GET IN TOUCH



1 888 685 9478



sales@slingcoamerica.com